


## Architectural Wallbox Dimmers

## ISD

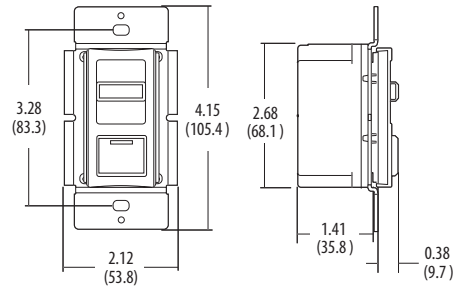

## Intended Use

The ISD Series wallbox dimmers are designed to provide smooth full-range dimming for a variety of loads. Products are available for incandescent, low voltage, electronic low voltage and fluorescent two-wire and four-wire load types. The ISD dimmers can be used in place of a standard wall switch to provide on/off and dimming lighting control.

## Features

Fluid slide movement allows fine adjustment of light level over the entire dimming range. Separate on/off switch permits switching of lighting at a preset level. An integral LED indicator on illuminated dimmers turns on when the switch is

off to facilitate switch location in a dark room. Can be used with standard three-way or four-way switch for multi-location switching. ISD Series dimmers are compatible with Leviton Decora® Series wallplates. Single location, linear slide dimming with separate push on/off switch for preset three-way and four-way switching. Available in standard white and ivory and supplied with a matching single-gang Decora® style wallplate. Snap-on Decora® style wallplate color change kits available (gray, black, brown, almond, white and ivory). Devices can be multi-gang mounted (optional multi-gang DSA wallplate required – see page 677).

## Listings

UL Listed. CSA Certified. NOM Certified.

## Ordering Information

Catalog number	
<u>Incandescent (supplied with white and ivory faceplates)</u>	
<b>ISD 600 I 120 WH/IV</b>	Illuminated slide dimmer; 600W, 120V, 60Hz
<b>ISD 1000 I 120 WH/IV</b>	Illuminated slide dimmer; 1000W, 120V, 60Hz
<u>Magnetic low voltage (supplied with white and ivory faceplates)</u>	
<b>ISD 600 LV 120 WH/IV</b>	Illuminated slide dimmer; 600VA, 120V, 60Hz
<b>ISD 1000 LV 120 WH/IV</b>	Illuminated slide dimmer; 1000VA, 120V, 60Hz
<u>Electronic low voltage (supplied with white and ivory faceplates)</u>	
<b>ISD 400 ELV 120 WH/IV</b>	Illuminated slide dimmer; 400VA, 120V, 60Hz
<u>Fluorescent Mark 10™ (supplied with white and ivory faceplates)</u>	
<b>ISD 600 ADEZ 120 WH/IV</b>	Slide dimmer; 600VA, 120V, 60Hz
<b>ISD 1000 ADEZ 120 WH/IV</b>	Slide dimmer; 1000VA, 120V, 60Hz
<b>ISD 1200 ADEZ 277 WH/IV</b>	Slide dimmer; 1200VA, 277V, 60Hz
<u>Fluorescent four-wire (supplied with white and ivory faceplates)</u>	
<b>ISD BC 120/277 WH/IV</b>	Ballast controller; 120/277V

## Example: ISD 600 LV 120 WH/IV

Accessories	(Order separately)
<b>ISD CCKIT</b>	Color change kit, specify WH (White), IV (Ivory), GY (Gray), BR (Brown), BK (Black) or AL (Almond).
<b>DSA FP D</b>	Low profile thermoplastic wall-plate for ISD or Leviton Decora® compatible devices (page 677).

## Maximum load/dimmer

Catalog Number	<u>ISD I/ISD LV/ISD ELV</u>		
	One gang	Two gang	More than two gang
ISD 1000 I 120	1000W	800W	700W
ISD 600 I 120	600W	500W	400W
ISD 1000 LV 120	1000VA	800VA	700VA
ISD 600 LV 120	600VA	500VA	400VA
ISD 400 ELV 120	400VA	350VA	250VA

## Maximum number of ballasts/dimmer

## 120V Advance Mark 10™

Catalog Number	Lamp type	<u>ISD 600 ADEZ 120</u>			<u>ISD 1000 ADEZ 120</u>		
		One gang	Two gang	More than two gang	One gang	Two gang	More than two gang
REZ-1T32	CFM32W	15	13	10	26	20	18
REZ-1T42	CFM42W	12	10	8	20	16	14
REZ-1Q18	CFQ18W	27	23	18	46	37	32
REZ-2Q18	CFQ18W	13	11	9	23	18	16
REZ-2Q26	CFQ26W	10	8	6	17	13	12
REZ-2T42	CFTR42W	6	5	4	10	8	7
REZ-132	F32T8	16	13	11	27	22	19
REZ-2S32	F32T8	8	6	5	13	11	9
REZ-3S32	F32T8	5	4	3	9	7	6
REZ-154	F54T5/HO	9	7	6	15	12	11
REZ-2S54	F54T5/HO	4	3	3	7	6	5
REZ-1TTS40	FT40W	14	12	9	24	19	17
REZ-2TTS40	FT40W	7	6	4	12	9	8

## Maximum number of ballasts/dimmer

## 277V Advance Mark 10™

Catalog Number	Lamp type	<u>ISD 1200 ADEZ 277</u>		
		One gang	Two gang	More than two gang
VEZ-2Q26	CFM26W	20	20	20
VEZ-1T32	CFM32W	30	30	30
VEZ-1T42	CFM42W	24	24	24
VEZ-1Q18	CFQ18W	54	54	54
VEZ-2Q18	CFQ18W	27	27	27
VEZ-2T42	CFTR42W	12	12	12
VEZ-132	F32T8	33	33	33
VEZ-2S32	F32T8	16	16	16
VEZ-3S32	F32T8	11	11	11
VEZ-154	F54T5/HO	18	18	18
VEZ-2S54	F54T5/HO	9	9	9
VEZ-1TTS40	FT40W	28	28	28
VEZ-2TTS40	FT40W	14	14	14