

OPTIONS





RL-ACC-SLIM-1-10F
10-ft long extension




RL-ACC-SLIM-1-20F
20-ft long extension

MOUNTING



RL-UNV-4/5/6
Multi-size: 4", 5", 6"
new construction pre-mounting plate with collar for use with screw down "C" style remodel housings

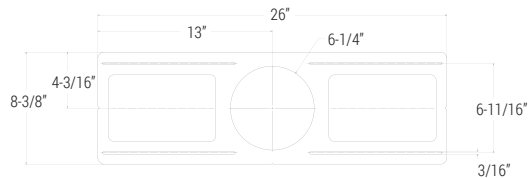

RL-ACC-SLIM-6-ROUGHPLATE
The MP3 is a 6" new construction pre-mounting plate with collar for use with screw down "C" style remodel housings

PHOTOMETRIC

RL655-700L-DIMTR-120-40K-90-WH

INPUT WATTS: **11.8**

LUMENS: **772**

CRI: **90**


EFFICACY: **65**

CCT: **4000K**

TEST NO.: **EL0119151**

SPACING CRITERIA: **1.52**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	75.15	9.70	9.70
0-30	162.87	21.10	21.10
0-40	274.60	35.60	35.60
0-60	527.95	68.40	68.40
0-80	737.04	95.50	95.50
0-90	771.64	100.00	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	12829	12516	12309
55	13896	13456	13241
65	15673	15135	14835
75	19936	19199	16311
85	26757	19939	16665

Lumens Per Zone

Zone	Lumens
0-10	19.22
10-20	55.92
20-30	87.73
30-40	111.73
40-50	125.59
50-60	127.76
60-70	117.46
70-80	91.62
80-90	34.60

Candela Tabulation

0	Q
0	202.54
5	202.28
15	198.93
25	191.43
35	180.34
45	165.63
55	145.53
65	120.94
75	94.21
85	42.58
90	0.56

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80%				70%				50%				30%				10%				0%			
	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	0%	0%	0%
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100
1	106	101	95	91	104	98	94	89	94	90	86	90	87	84	86	84	81	79	79	79	79	79	79	79
2	95	86	78	71	93	84	77	70	80	74	69	77	72	67	74	69	65	63	63	63	63	63	63	63
3	86	74	65	58	83	73	64	57	69	62	56	67	60	55	64	58	54	52	52	52	52	52	52	52
4	78	65	55	48	76	64	54	47	61	53	47	58	52	46	56	50	45	43	43	43	43	43	43	43
5	72	58	48	40	69	56	47	40	54	46	40	52	45	39	50	44	39	36	36	36	36	36	36	36
6	66	51	42	35	64	50	41	35	49	40	34	47	39	34	45	39	34	31	31	31	31	31	31	31
7	61	46	37	30	59	46	37	30	44	36	30	42	35	30	41	34	29	27	27	27	27	27	27	27
8	57	42	33	27	55	41	33	27	40	32	27	39	32	26	38	31	26	24	24	24	24	24	24	24
9	53	39	30	24	51	38	30	24	37	29	24	36	29	24	35	28	23	22	22	22	22	22	22	22
10	49	35	27	22	48	35	27	22	34	27	21	33	26	21	32	26	21	19	19	19	19	19	19	19

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance