



**Inductive sensor**  
**Ring sensor**  
**BI20R-Q14-AP6X2-H1141**



- Rectangular, height 14 mm
- Plastic, PBT-GF30-V0
- Static output behaviour
- Output pulse length min. 100 ms
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M12 x 1 male connector

**Wiring Diagram**



**Functional principle**


Inductive sensors detect metal objects contactless and wear-free. For this purpose they use a high-frequency electromagnetic AC field that interacts with the target. Inductive ring sensors generate this field through an LC resonant circuit. The target acts as the coil core.

<b>Type designation</b>	BI20R-Q14-AP6X2-H1141
Ident-No.	1407300
<b>Inside ring diameter D</b>	20.1 mm
Steel ball diameter (DIN 5401)	≥ 4 mm
Rated switching distance S <sub>n</sub>	20 mm
Fly-by speed pulse stop	1...28 m/s
Pulse duration at the output	≥ 5 ms
Ambient temperature	100 ms ± 20 %
	-25...+70 °C
<b>Operating voltage</b>	10...30 VDC
Residual ripple	≤ 10 % U <sub>is</sub>
DC rated operational current	≤ 200 mA
No-load current I <sub>0</sub>	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes/ Cyclic
Voltage drop at I <sub>0</sub>	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes/ Complete
Output function	3-wire, NO contact, PNP
Switching frequency	0.008 kHz
<b>Design</b>	Ring sensor,Q14
Dimensions	62.5 x 30 x 14 mm
Housing material	Plastic, PBT-GF30-V0
Electrical connection	Connectors, M12 x 1
Coil body	plastic, POM
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Packaging unit	1
<b>Power-on indication</b>	LED,Green
Switching state	LED,Yellow

**Inductive sensor**  
**Ring sensor**  
**BI20R-Q14-AP6X2-H1141**

---

Distance D	45 mm
Distance W	45 mm
Distance S	14 mm
Distance G	30 mm

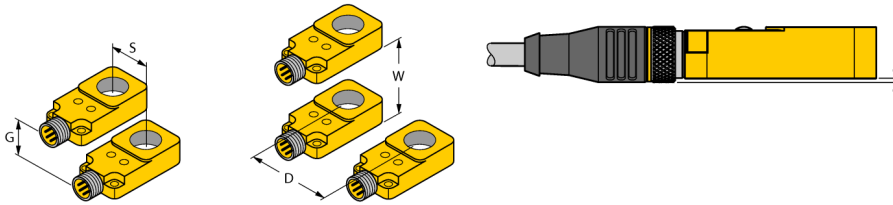

When mounting the sensor with an M12 connector, observe a low horizontal offset to the surface. This may vary depending on the choice of the connector.