


- Rectangular, height 12 mm
- Active face, lateral
- Plastic, PBT-GF30-V0
- Factor 1 for all metals
- Increased switching distance
- Protection class IP68
- Resistant to magnetic fields
- Mountable on metal
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- Cable connection

Wiring Diagram





Functional principle

Inductive sensors detect metal objects contactless and wear-free. Due to the patented multi-coil system, *uprox®* sensors have distinct advantages over conventional sensors. They excel in largest switching distances, maximum flexibility and operational reliability as well as efficient standardization.

Type designation	BI5U-Q12-AN6X2
Ident-No.	1635523
Rated switching distance Sn	5 mm
Mounting conditions	Flush
Secured operating distance	$\leq (0,81 \times S_n) \text{ mm}$
Repeat accuracy	$\leq 2 \% \text{ of full scale}$
Temperature drift	$\leq \pm 10 \%$
Hysteresis	3...15 %
Ambient temperature	-25...+70 °C
Operating voltage	10...30 VDC
Residual ripple	$\leq 10 \% U_{ss}$
DC rated operational current	$\leq 200 \text{ mA}$
No-load current I_0	$\leq 15 \text{ mA}$
Residual current	$\leq 0,1 \text{ mA}$
Isolation test voltage	$\leq 0,5 \text{ kV}$
Short-circuit protection	yes/ Cyclic
Voltage drop at I_L	$\leq 1,8 \text{ V}$
Wire breakage/Reverse polarity protection	yes/ Complete
Output function	3-wire, NO contact, NPN
Switching frequency	1 kHz
Design	Rectangular, Q12
Dimensions	40 x 26 x 12 mm
Housing material	Plastic, PA12-GF30
Electrical connection	Cable
Cable quality	4mm, LifYY-11Y, PUR, 2
Cable cross section	3 x 0,25 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Switching state	LED, Yellow

Distance D	48 mm
Distance W	25 mm
Distance S	12 mm
Distance G	50 mm

Width active area B	12 mm
----------------------------	-------

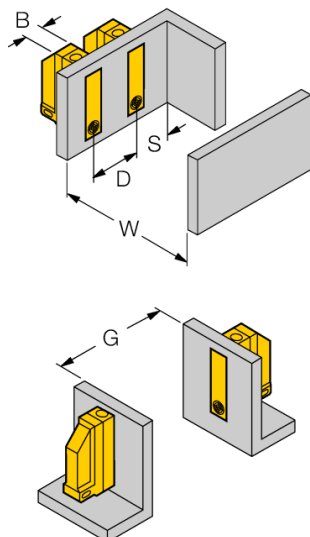

The sensors can be mounted directly side by side if a sensor with offset oscillation frequency Bi5U-Q12.../F2 is used.