



SlimPak Pro

WSPLD60LEDEB 60 Watt LED SlimPak
with Emergency Battery Back Up



SPECIFICATIONS:

Lumens: 6412
Watts: 63.94
Lumens/Watt: 100.2
CRI: 73.3
CCT: 4632
Lifespan: 200,000+ hrs.¹



Alpha Series LED
PROFESSIONAL GRADE



Patent Pending

Construction:

Designed for commercial and industrial applications, providing cooler operating temperatures, brighter light and longer LED life. Apertures for field or factory installed photocontrol. Hinged at bottom to prevent leakage.

Installation:

Labor saving features including bubble level and removable hinged face frame.

Zero Glare:

The fixture design directs more light down and forward without wasting lumens and offensive light.

Thermal Management:

Atlas SlimPak Pro fixtures are designed as a complete system to optimize LED life and light output. The Patent Pending thermal stacking heat removal technology extracts heat from within the housing moving it away from LEDs and components. The lower temperatures result in long LED life (200,000+ hrs) and component life and also allows for higher light output.

Listings:

Luminaire is certified to cUL and CSA Standards for Wet Locations
Lighting Facts Certified
DesignLights Consortium Premium qualified luminaire, eligible for rebates from DLC member utilities.

AC Input:

120/208/240/277 V

Driver:

Constant current, Non-Class 2, 120-277 VAC, 50-60 Hz
High Efficiency – min. 88%
Off-State Power: 0 Watts
0-10 V Dimming

LEDs:

4500K CCT

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80, and have received the Department of Energy "Lighting Facts" label.

Warranty:

Five-year limited warranty

Photo Control:

For factory installed 120V button photo control add suffix PC to part number.
Atlas uses only premium LED compatible photocontrols.

Emergency Battery Back Up:

Provides emergency illumination for a minimum of 90 minutes.

¹LED Life Span Based Upon LM-80 Test Results

Project Information



Job Name

Fixture Type 60 Watt LED Die Cast SlimPak

Catalog Number WSPLD60LEDEB

Approved by

DIMENSIONS:

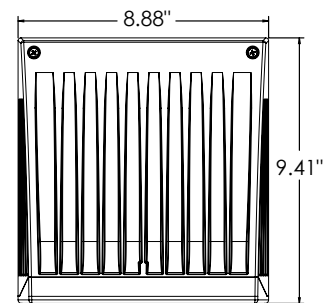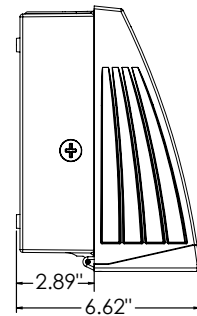

**Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.**

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216
800-849-8485 | FAX: 336-227-0110 | www.atlasled.com

Made in the USA of US and imported parts. Meets Buy American requirements within the ARRA.



SlimPak Pro


WSPLD60LEDEB 60 Watt LED SlimPak
with Emergency Battery Back Up

Atlas Lighting Products, Inc.

LED
lighting facts[®]
A Program of the U.S. DOE

Light Output (Lumens)	6412
Watts	63.94
Lumens per Watt (Efficacy)	100.28

Color Accuracy Color Rendering Index (CRI)	73
--	-----------

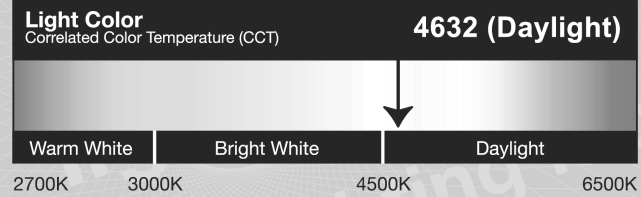

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: PRB4-4HX8N6 (8/24/2016)

Model Number: WSPLD60LEDEB

Type: Luminaire - Area/Roadway