



## TYPICAL MOTOR PERFORMANCE DATA

Model: Y154XDSB47A-P

| HP        | kW  | Pole       | FL RPM | Frame | Voltage        | Hz          | Phase    | FL Amps      |
|-----------|-----|------------|--------|-------|----------------|-------------|----------|--------------|
| 1.50      | 1.1 | 4          | 1750   | 145TC | 460            | 60          | 3        | 2.40         |
| Enclosure | IP  | Ins. Class | S.F.   | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC      | 56  | F          | 1.15   | CONT  | 86.5           | B           | M        | 40 C         |

| Load         | HP   | kW  | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|------|-----|---------|----------------|------------------|
| Full Load    | 1.50 | 1.1 | 2.4     | 85.5           | 72.7             |
| ¾ Load       | 1.13 | 0.8 | 1.9     | 82.0           | 64.8             |
| ½ Load       | 0.75 | 0.6 | 1.6     | 82.0           | 52.2             |
| ¼ Load       | 0.38 | 0.3 | 1.5     | 69.1           | 33.8             |
| No Load      |      |     | 1.3     |                |                  |
| Locked Rotor |      |     | 19.00   |                |                  |

| Torque            |                      |                 |                    | Rotor wk² Inertia (lb-ft²) |
|-------------------|----------------------|-----------------|--------------------|----------------------------|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) |                            |
| 4.5               | 285                  | 250             | 425                | 0.12                       |

| Safe Stall Time(s) |     | Sound Pressure dB(A) @ 1M | Bearings* |        | Approx. Motor Weight (lbs) |
|--------------------|-----|---------------------------|-----------|--------|----------------------------|
| Cold               | Hot |                           | DE        | NDE    |                            |
| 28.6               | 23  | -                         | 6305C3    | 6305C3 |                            |

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Mounting: C-Face Footed, Shaft: T Shaft

|             |  |  |
|-------------|--|--|
| Customer    |  |  |
| Customer PO |  |  |
| Sales Order |  |  |
| Project #   |  |  |

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**



|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | jaustin  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date  | 7/7/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

# SPEED TORQUE/CURRENT CURVE

Model: Y154XDSB47A-P

| HP                | kW                                                  | Pole              | FL RPM           | Frame | Voltage        | Hz          | Phase          | FL Amps      |
|-------------------|-----------------------------------------------------|-------------------|------------------|-------|----------------|-------------|----------------|--------------|
| 1.50              | 1.1                                                 | 4                 | 1750             | 145TC | 460            | 60          | 3              | 2.40         |
| Enclosure         | IP                                                  | Ins. Class        | S.F.             | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code       | Ambient (°C) |
| TEFC              | 56                                                  | F                 | 1.15             | CONT  | 86.5           | B           | M              | 40 C         |
| Locked Rotor Amps | Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> ) | Torque            |                  |       |                |             |                |              |
|                   |                                                     | Full Load (lb-ft) | Locked Rotor (%) |       | Pull Up (%)    |             | Break Down (%) |              |
| 19.00             | 0.12                                                | 4.5               | 285              |       | 250            |             | 425            |              |

## Design Values

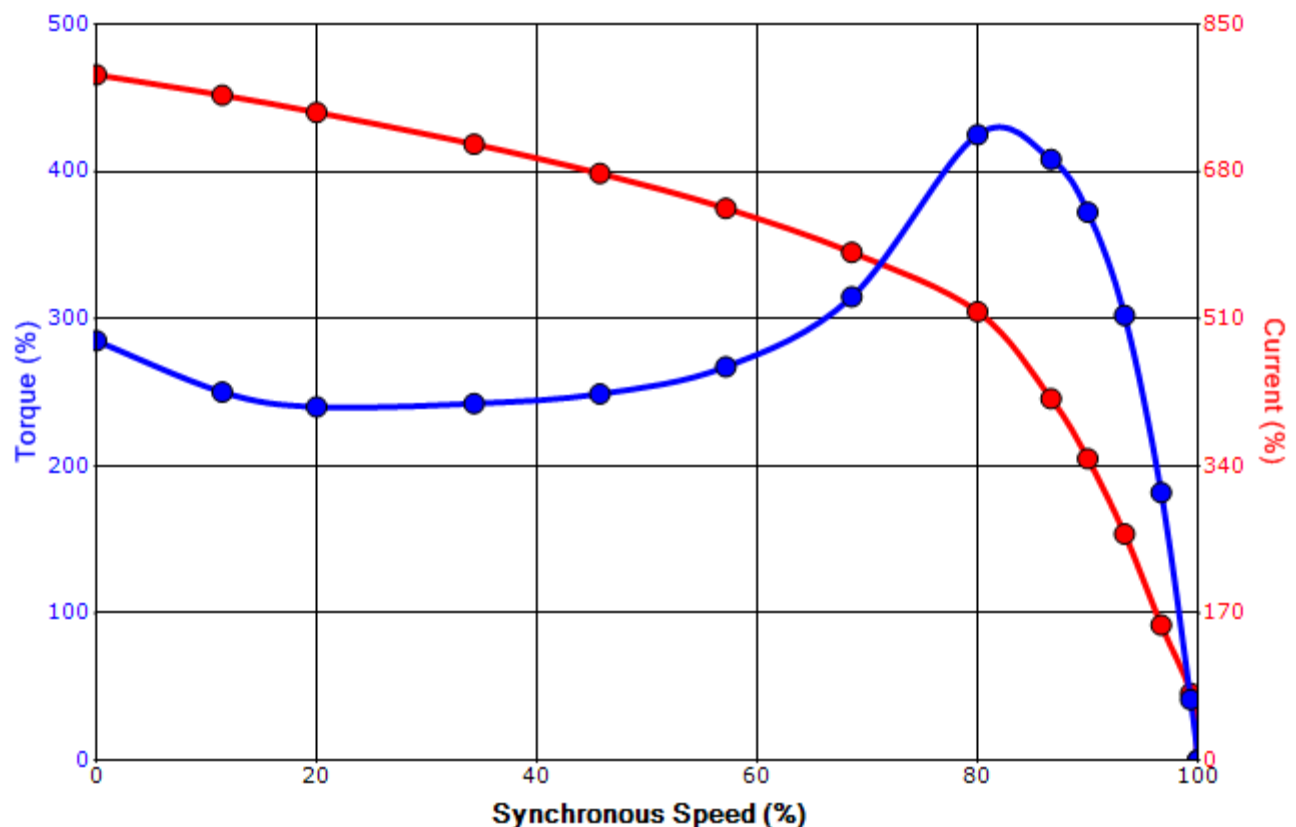

|             |  |  |                                                    |     |
|-------------|--|--|----------------------------------------------------|-----|
| Customer    |  |  | wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> ) | -   |
| Customer PO |  |  | Load Type                                          | -   |
| Sales Order |  |  | Voltage (%)                                        | 100 |
| Project #   |  |  | Accel. Time                                        | -   |

Tag:



All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | jaustin  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date  | 7/7/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

## Motor Connection Diagram

### 3 Leads - Wye Connection

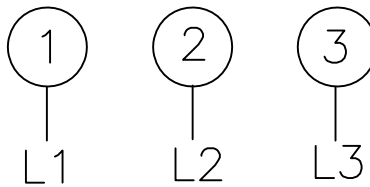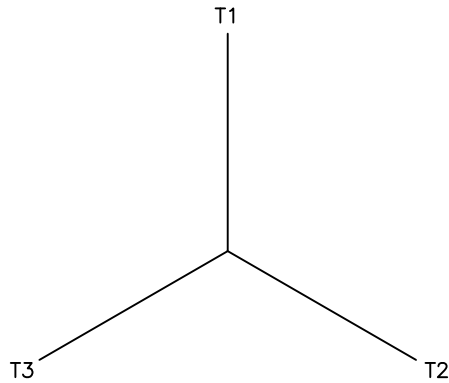

Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one  
of them will be labeled with the appropriate lead number.