

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
 3. KEY DIMENSIONS EQUAL (MOTOR SUPPLIED WITH KEY)
- 0.312" x 0.312" x 2.38"

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

**210T TEFC FRAME
F1 ASSEMBLY**

MDSLVO81-03

TOSHIBA
TOSHIBA INTERNATIONAL CORPORATION

TOLERANCES

| | |
|-------|-------|
| .X | .1 |
| .XX | .03 |
| .XXX | .005 |
| .XXXX | .0005 |

MAXIMUM MOTOR WEIGHT

| |
|----------|
| 186 lbs. |
| 84 kgs. |

| | | | | |
|----|---------------------------------------|----------|----------|-------|
| 0 | FIRST ISSUE (OVERRIDE 'S' DIM. VALUE) | N. MOMIN | 12/28/10 | JR |
| NO | REVISION | DRAWN BY | DATE | CHECK |



DRAWN BY: N. MOMIN
 CHECK BY: J. RUSSELL
 APPROVED BY: _____
 www.toshiba.com/ind

TYPICAL MOTOR PERFORMANCE DATA

Model: Y754XDSB41A-P

| | | | | | | | | |
|-----------|-----|------------|--------|-------|----------------|-------------|----------|--------------|
| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
| 7.50 | 5.5 | 4 | 1760 | 213T | 460 | 60 | 3 | 10 |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC | 56 | F | 1.15 | CONT | 91.7 | B | H | 40 C |

| | | | | | |
|--------------|------|-----|---------|----------------|------------------|
| Load | HP | kW | Amperes | Efficiency (%) | Power Factor (%) |
| Full Load | 7.50 | 5.6 | 9.8 | 91.8 | 79.9 |
| ¾ Load | 5.63 | 4.2 | 7.8 | 90.9 | 75.3 |
| ½ Load | 3.75 | 2.8 | 6.3 | 88.5 | 65.8 |
| ¼ Load | 1.88 | 1.4 | 4.5 | 80.8 | 48.0 |
| No Load | | | 4.4 | | 6.3 |
| Locked Rotor | | | 63.00 | | 45.7 |

| | | | | |
|-------------------|----------------------|-----------------|--------------------|-------------------------------|
| Torque | | | | Rotor wk ² |
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) | Inertia (lb-ft ²) |
| 22.4 | 270 | 215 | 340 | 1.15 |

| | | | | | |
|--------------------|------|---------------------------|-----------|--------|----------------------------|
| Safe Stall Time(s) | | Sound Pressure dB(A) @ 1M | Bearings* | | Approx. Motor Weight (lbs) |
| Cold | Hot | | DE | NDE | |
| 38.1 | 27.7 | - | 6308C3 | 6308C3 | |

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:EQP Global 841
Mounting:Footed,Shaft:T Shaft

| | |
|-------------|--|
| Customer | |
| Customer PO | |
| Sales Order | |
| Project # | |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.



| | | | | | |
|-------------|------------|------------------|-------------|-------------|---------------|
| Engineering | bmammen | Doc. Written By | D. Suarez | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date | 10/30/2015 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |

SPEED TORQUE/CURRENT CURVE

Model: Y754XDSB41A-P

| | | | | | | | | |
|-------------------|---|-------------------|------------------|-------------|----------------|-------------|----------|----------------|
| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
| 7.50 | 5.5 | 4 | 1760 | 213T | 460 | 60 | 3 | 10 |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC | 56 | F | 1.15 | CONT | 91.7 | B | H | 40 C |
| Locked Rotor Amps | Rotor wk ² Inertia (lb-ft ²) | Torque | | | | | | Break Down (%) |
| | | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) | | | | |
| 63.00 | 1.15 | 22.4 | 270 | 215 | | | 340 | |

Design Values

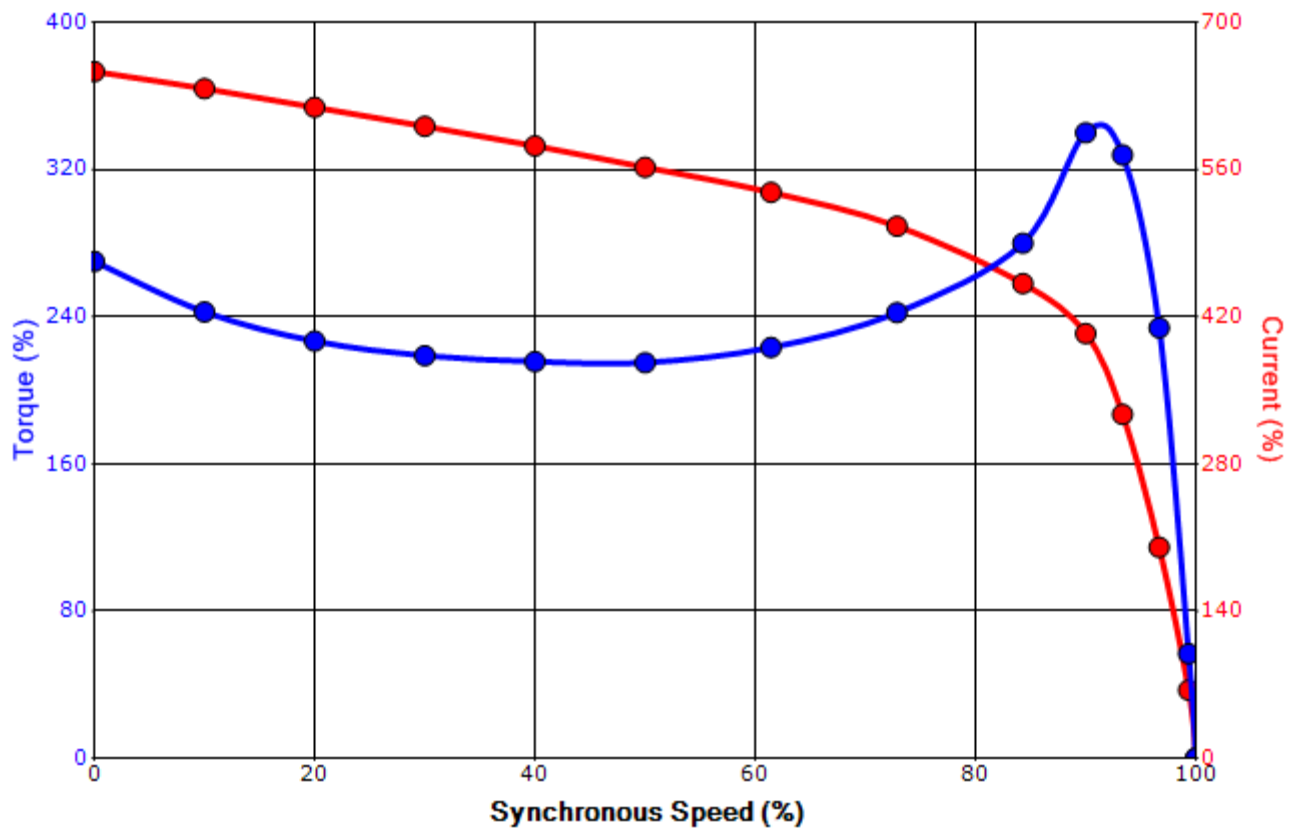

| | | | |
|-------------|--|--|-----|
| Customer | | wk ² Load Inertia (lb-ft ²) | - |
| Customer PO | | Load Type | - |
| Sales Order | | Voltage (%) | 100 |
| Project # | | Accel. Time | - |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

| | | | | | |
|-------------|------------|------------------|-------------|-------------|---------------|
| Engineering | bmammen | Doc. Written By | D. Suarez | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date | 10/30/2015 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |

Motor Connection Diagram 3 Leads - Delta Connection



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.
If multiple cables represent a single lead, each one
of them will be labeled with the appropriate lead number.