

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
  2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
  3. KEY DIMENSIONS EQUAL (MOTOR SUPPLIED WITH KEY)
- 0.312" x 0.312" x 2.38"

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

## 210T TEFC FRAME F1 ASSEMBLY

MDSLVO41-03

**TOSHIBA**  
TOSHIBA INTERNATIONAL CORPORATION

### TOLERANCES

.X	.1
.XX	.03
.XXX	.005
.XXXX	.0005

### MAXIMUM MOTOR WEIGHT

186 lbs.  
84 kgs.

0	FIRST ISSUE (OVERRIDE 'S' DIM. VALUE)	N. MOMIN	11/08/10	JR
NO	REVISION	DRAWN BY	DATE	CHECK

**EQP Global 840**  
**XT SERIES**

DRAWN BY: N. MOMIN  
CHECK BY: M. O'DOWD  
APPROVED BY: \_\_\_\_\_  
www.toshiba.com/ind

## TYPICAL MOTOR PERFORMANCE DATA

Model: Y754XSSB41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
7.50	5.5	4	1760	213T	460	60	3	10
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	91.7	B	H	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	7.50	5.6	9.8	91.8	79.9
¾ Load	5.63	4.2	7.8	90.9	75.3
½ Load	3.75	2.8	6.3	88.5	65.8
¼ Load	1.88	1.4	4.5	80.8	48.0
No Load			4.4		
Locked Rotor			63.00		

Torque				Rotor wk² Inertia (lb-ft²)
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
22.4	270	215	340	1.15

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
38.1	27.7	-	6308ZZC3	6308ZZC3	

\*Bearings are the only recommended spare part(s).

### Motor Options:

Product Family:EQP Global 840

Mounting:Footed,Shaft:T Shaft

Customer		
Customer PO		
Sales Order		
Project #		

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**


Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	10/30/2015	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

# SPEED TORQUE/CURRENT CURVE

Model: Y754XSSB41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
7.50	5.5	4	1760	213T	460	60	3	10
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	91.7	B	H	40 C
Locked Rotor Amps	Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> )	Torque						
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)		Break Down (%)		
63.00	1.15	22.4	270	215		340		

## Design Values

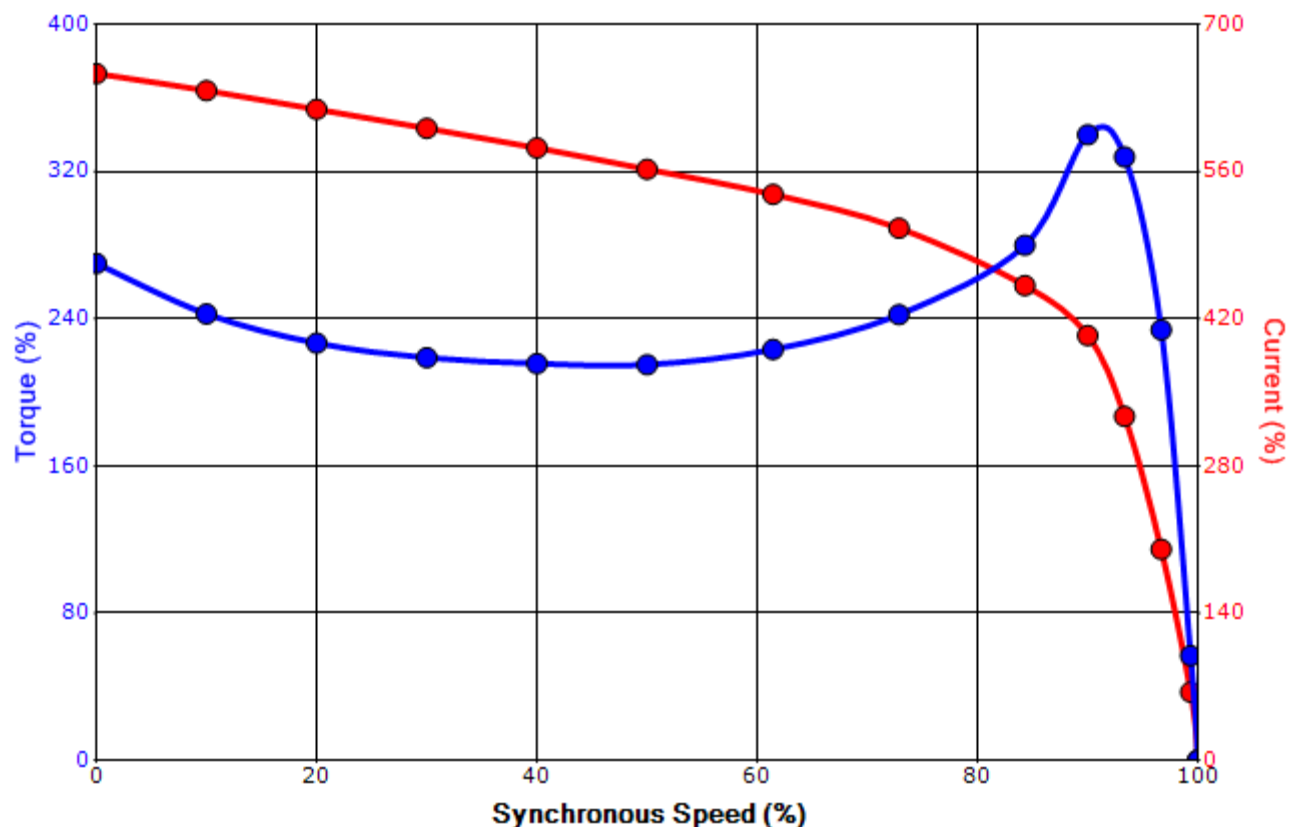

Customer			wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> )	-
Customer PO			Load Type	-
Sales Order			Voltage (%)	100
Project #			Accel. Time	-

Tag:



All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	10/30/2015	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

## Motor Connection Diagram

### 3 Leads - Wye Connection

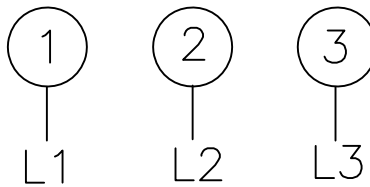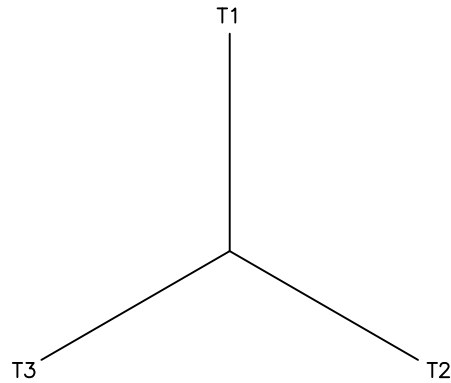

Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one  
of them will be labeled with the appropriate lead number.