

Miscellaneous

Conduit Beam Clamps, Malleable Iron

Features

- Steel bolt - Case hardened
- Standard sizes 3/4" - 2 1/2"
- Jaw opening 9/16" - 1 1/4"

Standard Materials

Malleable iron


^Steel

Standard Finish

Zinc plated

Applicable Third Party Standards

- UL Standard: 2239
- UL Listed File # E213669

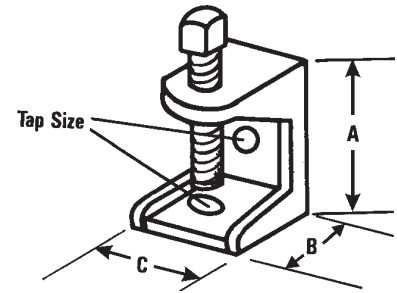

Conduit Beam Clamps

CATALOG NUMBER	TRADE SIZE	TAP SIZE	JAW OPENING	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
BC75-1KON	3/4"	10 - 24	0.563	1.25	1.125	0.875	25	100	15.7
BC75-2KON	3/4"	1/4 - 20	0.563	1.25	1.125	0.875	25	100	15.7
BC75-2-STKON^	3/4"	5/16 - 18	0.75	1.375	1.563	0.938	50	50	15.0
BC100-1KON	1"	10 - 24	0.75	1.375	1.375	1.188	25	50	24.0
BC100-2KON	1"	1/4 - 20	0.75	1.375	1.375	1.188	25	25	24.0
BC150KON	1-1/2"	5/16 - 18	0.688	1.563	1.5	1.438	-	25	34.7
BC200-1KON	2"	3/8 - 16	0.875	1.813	1.813	1.938	-	25	52.9
BC200-2KON	2"	3/8 - 16	0.875	1.813	1.813	1.938	-	25	52.9
BC250KON	2-1/2"	1/2 - 13	1.25	2.25	2.313	2.563	-	25	117.9

^UL Listing not applicable to these sizes

CATALOG NUMBER	TRADE SIZE	SCREW SIZE	LOAD RATING LBS
BC75-1KON	3/4"	1/4-20	50
BC75-2KON	3/4"	1/4 - 20	50
BC75-2-STKON	3/4"	5/16 - 18	N/A
BC100-1KON	1"	5/16 - 18	60
BC100-2KON	1"	5/16 - 18	60
BC150KON	1-1/2"	3/8 - 16	80
BC200-1KON	2"	3/8 - 16	100
BC200-2KON	2"	1/2 - 13	100
BC250KON	2-1/2"	1/2 - 13	200